

REGISTRO DE PREÇO
“MATERIAL PERMANENTE”
PROJETORES MULTIMIDIA

KONA INDÚSTRIA E COMÉRCIO LTDA

Contato na Empresa

(Departamento Comercial)

(34) 3312 3874 – Sônia Cristina

(34) 992067511 – Leonardo Cauhi

comercial@vivitek.com.br

Para mais detalhes sobre nossas Atas de Registro de Preços, consulte nosso departamento comercial.

ATAS VIGENTES

Pregão 01/2017

UASG: 160155

Órgão: 2º Batalhão de Fronteira

Telefone: 0xx65 3223 4413

E-mail: salc2bfron@gmail.com

Contato: Sr. Tenente Atila

Vigência: 07/06/2018

Item 12: Projetor Multimídia WXGA 5.000 Lumens

Marca: Vivitek Modelo: DW832

Quantidade: 15 Peças

Valor Unitário: R\$ 6.050,00

Pregão 18/2017

UASG: 926195

Órgão: Universidade Estadual de Roiraima

Telefone: 0xx95 2121 0921

E-mail: cpl@uerr.edu.br

Contato: Sr. Anderson Vieira de Siqueira e Silva

Vigência: 08/09/2018

***Item 01: Projetor Multimídia Interativo 3.300 Lumens c/
instalação***

Marca: Epson Modelo: 1460UI

Quantidade: 50 Peças

Valor Unitário: R\$ 21.950,00

Pregão 73/2017

UASG: 154043

Órgão: Universidade Federal do Mato Grosso do Sul

Telefone: 0xx67 3345 3501

E-mail: cgm.prad@ufms.br

Vigência: 23/02/2019

Item 102: Projetor Multimídia XGA 3.500 Lumens

Marca: Vivitek Modelo: DX 813

Quantidade: 149 Peças

Valor Unitário: R\$ 2.475,00

Item 103: Projetor Multimídia WXGA 5.000 Lumens

Marca: Vivitek Modelo: DW 832

Quantidade: 124 Peças (Acompanha Novo PRO)

Valor Unitário: R\$ 7.460,00

Item 106: Projetor Multimídia SVGA 3.500 Lumens

Marca: Vivitek Modelo: DS 262

Quantidade: 30 Peças

Valor Unitário: R\$ 1.980,00

Pregão 88/2016

UASG: 153038

Órgão: Universidade Federal da Bahia

Telefone: 0xx71 3283 6170 / 6079

E-mail: adesaocmp@ufba.br

Contato: Sra. Elieide Santos Orrico

Vigência: 28/09/2018

Item 199: Projetor Multimídia WXGA 5.000 Lumens

Marca: Vivitek Modelo: DW 832

Quantidade: 06 Peças (Acompanha Suporte de Teto)

Valor Unitário: R\$ 8.000,00

Item 200: Projetor Multimídia WXGA 5.000 Lumens

Marca: Vivitek **Modelo: DW 832**
Quantidade: 96 Peças (*Acompanha Suporte de Teto*)
Valor Unitário: R\$ 8.000,00

Pregão 203/2017

UASG: 154043

Órgão: Universidade Federal de Uberlândia

Telefone: 0xx34 3239 4857

E-mail: sergiob@ufu.br / dircl@ufu.br

Contato: Sr. Sérgio

Vigência: 19/01/2019

Item 1: Projetor Multimídia XGA 3.500 Lumens

Marca: Vivitek **Modelo: DX 263**

Quantidade: 250 Peças

Valor Unitário: R\$ 2.242,00

Item 2: Projetor Multimídia WXGA 5.000 Lumens

Marca: Vivitek **Modelo: DW 832**

Quantidade: 25 Peças

Valor Unitário: R\$ 5.720,00

Pregão 27/2017

UASG: 153031

Órgão: Universidade Federal de São Paulo

Telefone: 0xx11 5576 4848 (Ramal 6131)

E-mail: compras.guarulhos@unifesp.br

Contato: Sr. Rogério

Vigência: 08/08/2018

Item 1: Projetor Multimídia WXGA 3.500 Lumens

Marca: Vivitek **Modelo: DW 265**

Quantidade: 30 Peças

Valor Unitário: R\$ 3.398,00



EDUCATION
3D PROJECTOR

DW832



High Brightness, High Performance In Widescreen with Full 3D

Designed for high brightness and performance in widescreen presentation format. The DW832 offers outstanding brightness in its class together with features like comprehensive 3D support, installation flexibility with a 1.5x zoom lens, comprehensive connectivity, all in a compact chassis. Rapid start and shutdown allows the DW832 to be there at a moments notice. True value from a worldwide leader in projection technology.

Features


- Native WXGA resolution and displays up to WUXGA
- 5000 lumens of brightness with a 15,000:1 contrast
- 3D-Ready via DLP® Link™, Full 3D From Blu-Ray or broadcasted via cable or satellite
- 6-segment colorwheel for accurate and detailed color images
- Variety of display connectivity options including: HDMI (x2), VGA-in (2x), VGA-Out, S-Video and Composite Video
- MHL device connectivity for streaming of content (video, audio, documents, presentations) from a compatible Android™ device
- Built-in 10W audio speaker with multiple audio-in and audio-out ports
- High-efficiency lamps that last up to 3500 hours (in Image Care Mode)
- Integrated Closed Caption Decoding (CCD) automatically converts the audio portion of a TV's signal and displays it as subtitles on the projected screen
- RJ45/RS-232c for integration and system administration. Integrated network monitoring and management solutions (product certified) including Crestron® RoomView™, Extron, AMX SSDP, and Telnet
- 12V trigger for simple screen/projector automation
- Top-loading sliding cover for quick and easy lamp replacement
- Anti-theft security features include: Kensington® security slot, and security bar

Specifications																	
Brightness	5000 Lumens																
Native Resolution	WXGA (1280 x 800)																
Max. Resolution	WUXGA (1920 x 1200)																
Contrast Ratio	15,000:1 (Full On/Off)																
Lamp Life and Type	2500/3000/3500 Hours (Normal/Eco/Image Care Mode), 310W / 245W																
Lamp Part #	N/A																
Display Type	Single 0.65" DLP® Technology by Texas Instruments																
Throw Ratio (±3%)	1.46 to 2.20 (Distance/Width)																
Image Size (Diagonal)	25" - 318" (0.64 - 8.07m)																
Projection Distance	3.94' to 32.8' (1.2 to 10m)																
Projection Lens	F=2.42 - 2.97, f= 20.70 - 31.05mm																
Zoom Ratio	1.5X																
Aspect Ratio	16:10 Native; 16:9, and 4:3 Compatible																
Offset	111.3%																
Keystone Correction	±40° Vertical, ±40 Steps																
Color Spectrum	1.07 Billion																
Horizontal Scan Rate	15, 31 to 91.4KHz																
Vertical Scan Rate	24 ~ 30Hz, 47 ~ 120Hz																
Speaker	10 Watt Mono																
Remote Control	Full Featured IR Remote w/ Laser Pointer																
Projection Method	Table Top or Ceiling Mount (Front or Rear)																
Uniformity	83%																
Computer Compatibility	WUXGA, UXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized; VESA Standards; PC and Macintosh Compatible																
Video Compatibility	SDTV (480i, 576i), EDTV (480p, 576p), HDTV (720p, 1080i/p), NTSC (M, 3.58/4.43 MHz), PAL (B, D, G, H, I, M, N), SECAM (B, D, G, K, K1, L)																
Full 3D Video Compatibility	720p 50/60 Frame Packing, 1080i 50/60 Side-by-Side, 1080p24 Frame Packing, Frame Sequential (DLP® Link™, HDMI 1.4b (Blu-Ray))																
I/O Connection Ports	<table border="1"> <tr> <td>HDMI/MHL v1.4b (x2)</td> <td>RJ45 LAN Control (x1)</td> </tr> <tr> <td>HDMI v1.4b (x1)</td> <td>RS-232c (x1) Serial Control</td> </tr> <tr> <td>VGA In (15pin D-Sub) (x2)</td> <td>Audio-In (RCA I/II) (x1)</td> </tr> <tr> <td>VGA Out (15pin D-Sub) (x1)</td> <td>Audio-Out (3.5mm Mini-Jack) (x1)</td> </tr> <tr> <td>Composite Video (x1)</td> <td>Audio-Out (3.5mm Mini-Jack) (x1)</td> </tr> <tr> <td>S-Video (x1)</td> <td>12V-Trigger (3.5 Mini-Jack) (x1)</td> </tr> <tr> <td>Microphone (3.5mm Mini-Jack)</td> <td>Mini-USB (Service Only)</td> </tr> <tr> <td>SV-Out 1.5A (USB Type A connector)</td> <td></td> </tr> </table>	HDMI/MHL v1.4b (x2)	RJ45 LAN Control (x1)	HDMI v1.4b (x1)	RS-232c (x1) Serial Control	VGA In (15pin D-Sub) (x2)	Audio-In (RCA I/II) (x1)	VGA Out (15pin D-Sub) (x1)	Audio-Out (3.5mm Mini-Jack) (x1)	Composite Video (x1)	Audio-Out (3.5mm Mini-Jack) (x1)	S-Video (x1)	12V-Trigger (3.5 Mini-Jack) (x1)	Microphone (3.5mm Mini-Jack)	Mini-USB (Service Only)	SV-Out 1.5A (USB Type A connector)	
HDMI/MHL v1.4b (x2)	RJ45 LAN Control (x1)																
HDMI v1.4b (x1)	RS-232c (x1) Serial Control																
VGA In (15pin D-Sub) (x2)	Audio-In (RCA I/II) (x1)																
VGA Out (15pin D-Sub) (x1)	Audio-Out (3.5mm Mini-Jack) (x1)																
Composite Video (x1)	Audio-Out (3.5mm Mini-Jack) (x1)																
S-Video (x1)	12V-Trigger (3.5 Mini-Jack) (x1)																
Microphone (3.5mm Mini-Jack)	Mini-USB (Service Only)																
SV-Out 1.5A (USB Type A connector)																	
Security	Kensington® Lock Port																
Weight	7.0lbs (3.2kg)																
Dimensions (W x D x H)	12.5" x 8.5" x 4.9" (319 x 216 x 126mm)																
Noise Level	34dB/38dB (Eco/Normal Mode)																
Power	Supply: AC 100-240V, 50/60Hz Consumption: 410W (Normal Mode), 3200W (Eco Mode), <0.5W (Standby Mode), <2W (LAN Standby Mode)																
Operating Temperature	41 to 104°F (5 to 40°C)																
Warranty	3-Year Limited Parts/Labor, 1-year Lamp																
Standard Accessories	AC Power Cord, VGA Cable, Remote Control, Batteries for Remote, User's Manual (CD), Warranty Card																
UPC	813097021340																



© Copyright 2011 Vivitek Corporation. DLP® and the DLP logo are registered trademarks of Texas Instruments. All specifications are subject to change at anytime.

BrightLink® Pro 1460Ui Full HD Interactive Display

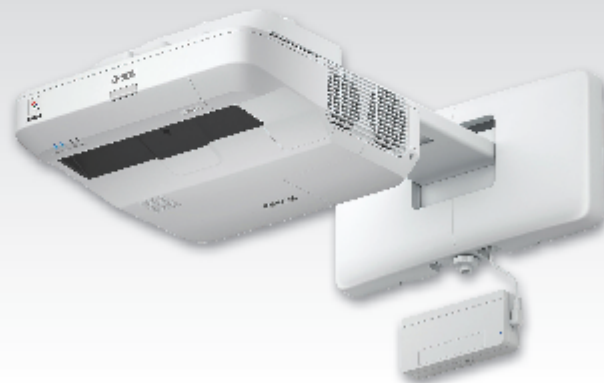

The bright Full HD interactive display for more efficient meetings.

Reinvent your whiteboard — turn any wall or existing dry-erase board into a 100" interactive display for more efficient meetings and collaboration, in the room or across the globe

Bright display — 4,400 lumens color/white brightness¹

Full HD WUXGA display up to 100" — for an optimal viewing experience and clear readability — 3x as big as a 60" flat panel

Easy-to-use, touch-enabled interactivity — just turn on BrightLink Pro and start writing using your finger or the included pens

Wireless screen mirroring — stream Full HD 1080p content; mirror your Android™ device screen with Miracast®

Capture, save and share — no need to transcribe meeting notes or snap a photo; easily save, print or email directly from your BrightLink Pro

Whiteboard sharing — both local and remote participants can simultaneously annotate content from mobile devices, computers and other BrightLink Pros

Wireless device compatibility — wirelessly display documents, files and photos from your iPad®, iPhone®, and Android mobile devices with the Epson iProjection™ App²

Convenient DVI-out connectivity — share whiteboard content to a larger display, videoconferencing system or recording device

DuoLink — install two interactive displays side by side to achieve an even larger interactive display area³



EDUCATION
3D PROJECTOR

DX813



High Performance Presentation with Full 3D Ready

Designed for high performance with full presentation functionality, the DX813 3D digital projector offers outstanding digital image, versatility and value. With HDTV compatibility, rapid start-up and shutdown, the DX813 offers ease-of-use operation. The Vivitek DX813 digital projector also feature multiple connectivity options, DLP® and BrilliantColor™ technologies, and long-life lamp promoting environment friendly operation.

Features

- Native XGA resolution and displays up to WUXGA
- 3600 lumens of brightness with a 15,000:1 contrast
- 3D-Ready via DLP® Link™, Full 3D from Blu-Ray or broadcasted via cable or satellite
- 6-segment colorwheel for accurate and detailed images
- Sealed optical engine to keep dust out and improve performance
- High-efficiency lamps that last up to 7000 hours (in Dynamic Eco mode)
- Rated intensive use for color consistency over time* (*12 hours per day without yellowing or discoloration of image)
- VGA-out for display on a secondary monitor
- Keypad lock prevents accidental system adjustments
- Enhanced color and display adjustments
- Top-loading, sliding cover for quick and easy lamp replacement
- RJ45/RS-232c for integration and system administration. Integrated network monitoring and management solutions (product certified) including Crestron® RoomView™, Extron, AMX SSCP, and Telnet
- 12V trigger for simple screen/projector automation
- Anti-theft security features include: Kensington® security slot, and security bar



Specifications	
Brightness	3600 Lumens
Native Resolution	XGA (1024 x 768)
Max. Resolution	WUXGA (1920 x 1200) @60Hz
Contrast Ratio	15,000:1 (Full On/Off)
Lamp Life and Type	3500/5000/7000 Hours (Normal/Eco Mode), 240W
Lamp Part #	5811119560-SVV
Display Type	Single 0.55" DLP® Technology by Texas Instruments
Throw Ratio (±3%)	1.6 to 1.92:1 (Distance/Width)
Image Size (Diagonal)	25.6" - 256.4" (0.65 - 6.5 m)
Projection Distance	3.28' to 32.8' (1 to 10m)
Projection Lens	F2.5~2.72, f=17.81~21.35mm
Zoom Ratio	1.2:1 Manual Zoom/Focus Lens
Aspect Ratio	4:3 Native, 16:9 Compatible
Offset	113.9%
Keystone Correction	±40° Vertical; +/-40 Steps
Color Spectrum	1.07 Billion
Horizontal Scan Rate	15, 31 to 91.4KHz
Vertical Scan Rate	24 ~ 30Hz, 47 ~ 120Hz
Speaker	10 Watt Mono
Remote Control	Full Featured IR Remote w/ Laser Pointer
Projection Method	Table Top or Ceiling Mount (Front or Rear)
Uniformity	85%
Computer Compatibility	WUXGA, UXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized; VESA Standards; PC and Macintosh Compatible
Video Compatibility	SDTV (480i, 576i), EDTV (480p, 576p), HDTV (720p, 1080i/p), NTSC (M, 3.58/4.43 MHz), PAL (B, D, G, H, I, M, N), SECAM (B, D, G, K, KL, L)
3D Compatibility	Yes (DLP® Link™, Full 3D from Blu-Ray or broadcasted via cable or satellite)
Full 3D Video Compatibility	720p 50/60 Frame Packing, 1080i 50/60 Side-by-Side, 1080p24 Frame Packing
I/O Connection Ports	HDMI v1.4, VGA-In (X2), S-Video, Composite Video, VGA-Out, Audio-In (Mini-Jack) x3, Audio-Out (Mini-Jack), Microphone-In (Mini-Jack), RJ45, RS-232c, 12V Trigger, USB Type A (Power only), Mini USB (Service)
Security	Kensington® Lock Port
Weight	7.05lbs (3.2kg)
Dimensions (W x D x H)	12.36" x 8.50" x 4.96" (314 x 216 x 126 mm)
Noise Level	32dB/36dB (Eco/Normal Mode)
Power	Supply: AC 100-240V, 50/60Hz Consumption: 310W (Normal Mode), 250W (Eco Mode), <0.5W (Standby Mode)
Operating Temperature	41 to 104°F (5 to 40°C)
Warranty	5-Year Limited Parts/Labor, 1year Lamp
Standard Accessories	AC Power Cord, VGA Cable, Mini Jack RCA Cable, Remote Control, Batteries for Remote, Carrying Case, User's Manual (CD), Lens Cap, Warranty Card
UPC	814964 339898



Portable Projector

Vivitek DS262

Feature-rich SVGA projector for versatility and portability



Features

- High 3,500 ANSI lumens of brightness for projection even in bright meeting rooms
- Great 15,000:1 contrast ratio ensuring clear presentations and sharp text.
- Native SVGA (800 x 600) resolution up to maximum WUXGA (1,920 x 1,200)
- DLP® and BrilliantColor™ technologies for distinct and vibrant images
- Low cost of ownership and maintenance with an energy efficient lamp for up to 10,000 hours (Dynamic Eco. Mode) of usage
- 6 segment (RGBYCW) color wheel for improved and vivid color reproduction
- 3D Ready via DLP® Link™ and HDMI v.1.4
- Audio ready with 2 watt audio speaker and audio-in/out ports
- Quiet operation with low 29dB (Eco mode) acoustic noise
- Top sided lamp cover for simple lamp removal and insertion
- Intuitive multiple language OSD (On-screen Display) menu
- Environmentally friendly with less than 0.5W of power in stand-by mode
- Portable and lightweight at only 2.6kg (5.7lbs)
- Anti-theft security features include: Kensington® security slot, security bar, and power button lock

Specifications

Display Type	Single Chip 0.55" DLP Technology by TI
Brightness	3,500 ANSI Lumens
Native Resolution	SVGA (800 x 600)
Maximum Resolution	WUXGA (1,920 x 1,200)
Contrast Ratio	15,000:1
Lamp Life/Type	5,000/7,000/10,000 Hours (Normal/Eco/Dynamic Eco), 210W
Throw Ratio	1.94 - 2.32
Image Size (Diagonal)	40" - 240"
Projection Distance	1.6m - 10.1m (5.2' - 33.1')
Projection Lens	F#2.46 - 2.66, f=21.8 - 25.6mm
Zoom Ratio	1.2x
Aspect Ratio	4:3
Offset	104%±5%
Keystone Correction	Vertical±40°
Horizontal Frequency	15 - 102kHz
Vertical Frequency	23 - 120Hz
3D Compatibility	Yes
Speaker	2W
Computer Compatibility	VGA (640 x 480) to WUXGA_RB(1920 x 1200)
Video Compatibility	NTSC, PAL, SECAM / 480i, 480p, 576i, 576p, 720p, 1080i, 1080p
I/O Connection Ports	HDMI v1.4b (x2), Composite Video, S-Video, VGA-In (x2), Audio-In (Mini-Jack), VGA-Out, Audio-Out (Mini-Jack), RS232, USB (Service)
Projection Method	Table Top, Ceiling Mount (Front or Rear)
Security Solutions	Kensington® Security Slot, Keypad Lock
Dimensions (w/o box)	331 x 244 x 105mm (13" x 9.6" x 4.1")
Weight	2.6kg (5.7lbs)
Available Colors	White
Noise Level	31.2dB/28dB (Normal/Eco. Mode)
Power Supply	AC 100-240V, 50/60Hz
Power Consumption	240W (Normal Mode), 203W (Eco. Mode), <0.5W (Standby Mode)
Standard Accessories	AC Power Cord, VGA Cable, Remote Control, Documentation Kit
Optional Accessories	Lamp

©2017 Vivitek. Vivitek is a trademark of Delta Electronics, Inc. Other trademarks are the properties of their respective owners. Values, weights and dimensions shown are approximate. Errors and omissions accepted. Specifications are subject to change without prior notice.



Photos





Portable Projector

Vivitek DX263

Value-oriented XGA projector with a brilliant image, long-life lamp and audio ready



Features

- High 3,500 ANSI lumens of brightness for projection even in bright meeting rooms
- Great 15,000:1 contrast ratio ensuring clear presentations and sharp text.
- Native XGA (1024 x 768) resolution up to maximum WUXGA (1,920 x 1,200)
- DLP® and BrilliantColor™ technologies for distinct and vibrant images
- Low cost of ownership and maintenance with an energy efficient lamp for up to 10,000 hours (Dynamic Eco. Mode) of usage
- 6 segment (RGBYCW) color wheel for improved and vivid color reproduction
- 3D Ready via DLP® Link™ and HDMI v.1.4
- Audio ready with 2 watt audio speaker and audio-in/out ports
- Quiet operation with low 29dB (Eco mode) acoustic noise
- Top sided lamp cover for simple lamp removal and insertion
- Intuitive multiple language OSD (On-screen Display) menu
- Environmentally friendly with less than 0.5W of power in stand-by mode
- Portable and lightweight at only 2.6kg (5.7lbs)
- Anti-theft security features include: Kensington® security slot, security bar, and power button lock

Photos



Specifications

Display Type	Single Chip 0.55" DLP Technology by TI
Brightness	3,500 ANSI Lumens
Native Resolution	XGA (1024 x 768)
Maximum Resolution	WUXGA (1,920 x 1,200)
Contrast Ratio	15,000:1
Lamp Life/Type	5,000/7,000/10,000 Hours (Normal/Eco./Dynamic Eco), 210W
Throw Ratio	1.94 - 2.32
Image Size (Diagonal)	40" - 240"
Projection Distance	1.6m - 10.1m (5.2' - 33.1')
Projection Lens	F#2.46 - 2.66, f=21.8 - 25.6mm
Zoom Ratio	1.2x
Aspect Ratio	4:3
Offset	104%±5%
Keystone Correction	Vertical:±40°
Horizontal Frequency	15 - 102kHz
Vertical Frequency	23 - 120Hz
3D Compatibility	Yes
Speaker	2W
Computer Compatibility	VGA (640 x 480) to WUXGA_RB(1920 x 1200)
Video Compatibility	NTSC, PAL, SECAM / 480i, 480p, 576i, 576p, 720p, 1080i, 1080p
IO Connection Ports	HDMI v1.4b (x2), Composite Video, S-Video, VGA-In (x2), Audio-In (Mini-Jack), VGA-Out, Audio-Out (Mini-Jack), RS232, USB (Service)
Projection Method	Table Top, Ceiling Mount (Front or Rear)
Security Solutions	Kensington® Security Slot, Keypad Lock
Dimensions (w/d/h)	331 x 244 x 105mm (13" x 9.6" x 4.1")
Weight	2.6kg (5.7lbs)
Available Colors	White
Noise Level	31dB/28dB (Normal/Eco. Mode)
Power Supply	AC 100-240V, 50/60Hz
Power Consumption	240W (Normal Mode), 203W (Eco. Mode), <0.5W (Standby Mode)
Standard Accessories	AC Power Cord, VGA Cable, Remote Control, Documentation Kit
Optional Accessories	Lamp

©2017 Vivitek. Vivitek is a trademark of Delta Electronics, Inc. Other trademarks are the properties of their respective owners. Values, weights and dimensions shown are approximate. Errors and omissions accepted. Specifications are subject to change without prior notice.





Portable Projector

Vivitek DW265

Portable widescreen projector with long-life lamp and multiple I/O ports



Features

- Up to 3,500 ANSI lumens with a 15,000:1 contrast ratio
- Native WXGA resolution with a maximum WUXGA resolution
- DLP® and BrilliantColor™ technologies for distinct and vibrant images
- Low cost of ownership and maintenance with an energy efficient lamp for up to 10,000 hours (Dynamic Eco. Mode) of usage
- 6 segment (RGBYCW) color wheel for improved and vivid color reproduction
- Manual zoom and focus for easy adjustment and positioning flexibility
- Full suite of display connectivity inputs and outputs
- 2W of total stereo audio power with multiple audio-in and audio-out ports
- Choose from 8 pre-set display modes to get the most suitable display image
- Top sided lamp cover for simple lamp removal and insertion
- Intuitive multiple language OSD (On-screen Display) menu
- Environmentally friendly with less than 0.5W of power in stand-by mode
- Portable and lightweight at only 2.6kg (5.7lbs)
- Anti-theft security features include: Kensington® security slot, and security bar

Specifications

Display Type	Single Chip 0.65" DLP Technology by TI
Brightness	3,500 ANSI Lumens
Native Resolution	WXGA (1,280 x 800)
Maximum Resolution	WUXGA (1,920 x 1,200)
Contrast Ratio	15,000:1
Lamp Life/Type	5,000/7,000/10,000 Hours (Normal/Eco./Dynamic Eco), 210W
Throw Ratio	1.55 - 1.86
Image Size (Diagonal)	40" - 240"
Projection Distance	1.3m - 8.5m (4.3' - 28')
Projection Lens	F#2.46 - 2.66, f=21.8 - 25.6mm
Zoom Ratio	1.2x
Aspect Ratio	16:10
Offset	101.5%±5%
Keystone Correction	Vertical:±40°
Horizontal Frequency	15 - 102KHz
Vertical Frequency	23 - 120Hz
3D Compatibility	Yes
Speaker	2W
Computer Compatibility	VGA (640 x 480) to WUXGA_RB(1920 x 1200)
Video Compatibility	NTSC, PAL, SECAM / 480i, 480p, 576i, 576p, 720p, 1080i, 1080p
I/O Connection Ports	HDMI v1.4b (x2), Composite Video, S-Video, VGA-In (x2), Audio-In (Mini-Jack), VGA-Out, Audio-Out (Mini-Jack), RS232, USB (Service)
Projection Method	Table Top, Ceiling Mount (Front or Rear)
Security Solutions	Kensington® Security Slot, Keypad Lock
Dimensions (w/out)	331 x 244 x 105mm (13" x 9.6" x 4.1")
Weight	2.6kg (5.7lbs)
Available Colors	White
Noise Level	31dB/28dB (Normal/Eco. Mode)
Power Supply	AC 100-240V, 50/60Hz
Power Consumption	240W (Normal Mode), 203W (Eco. Mode), <0.5W (Standby Mode)
Standard Accessories	AC Power Cord, VGA Cable, Remote Control, Documentation Kit
Optional Accessories	Lamp

©2017 Vivitek. Vivitek is a trademark of Delta Electronics, Inc. Other trademarks are the properties of their respective owners. Values, weights and dimensions shown are approximate. Errors and omissions accepted. Specifications are subject to change without prior notice.



Photos



V6.5 - 08032017

www.vivitekcorp.com

A brand of DELTA